


GreenOption™

SL-A650W-FS

One **GreenOption™** SL-A650W-FS fixture contains ten light bars each 65W.




**mounting and electrical hardware included.*

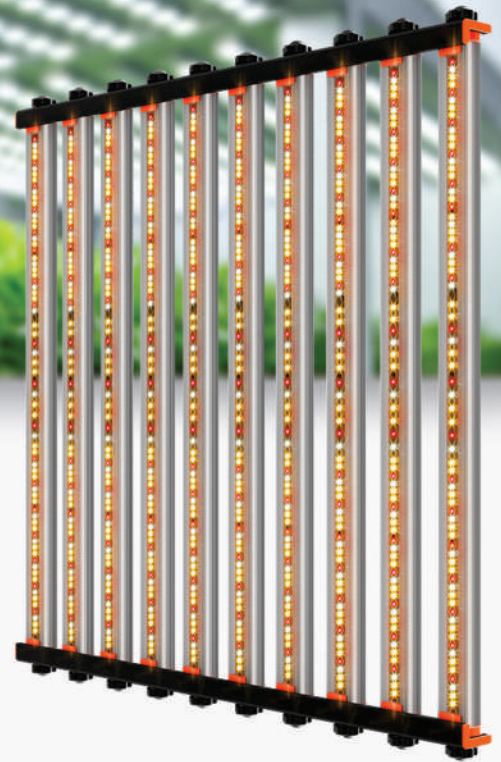

Fixture Specifications

Typical Input Power	650 Watts
Typical Photon Flux (PPF)	1750 $\mu\text{mol/s}$
PPE	2.7 $\mu\text{mol/J}$
Operating Frequency	50-60 Hz
Operating Temperature	-10 - 40 °C
IP-Rating	IP 65
LED Chip	Osram
Wavelength	3000K + 6000K + 660nm
Material	Aluminum
Net Weight	10.8 kg
Dimensions LxWxH	875 x 890 x 50 mm
Working Lifetime	50 000 hours
Warranty	3 years



GreenOption™ Full Spectrum

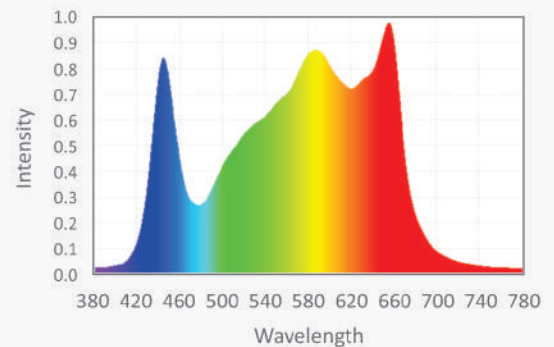

Our Full Spectrum is an enriched white spectrum that takes the best of HPS and Metal Halide strategies and improves upon them by boosting the red and blue wavelengths. Designed to grow the way you're used to, without the high energy bill.

Max Input Amperage by Voltage Service

Voltage	120V	208V	240V	277V
Amperage	6.00A	3.46A	3.00A	2.60A

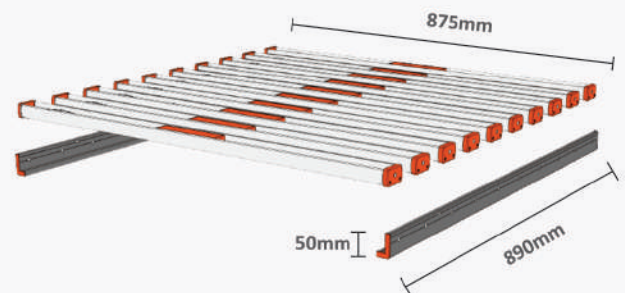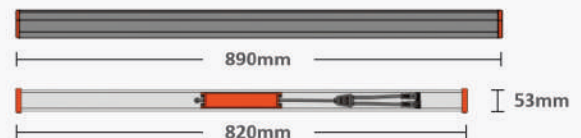

OSCONIQ® S 3030



High Transmittance
Waterproof Coating



Surface Temperature
is below 60°C



Long lifespan,
Independent driver



GREEN OPTION

©2021, Green Option LLC, All rights reserved.